


# Plastazote® MP15 FR

## Flame Retardant, Metallocene Polyethylene Foam Data Sheet

Plastazote® MP grades are closed cell, cross-linked, metallocene polyethylene foams manufactured using Zotefoams unique production process.

This data sheet characterises Plastazote MP15FR which is available in sheet form and is fabricated by modern techniques and can be thermoformed into shapes.

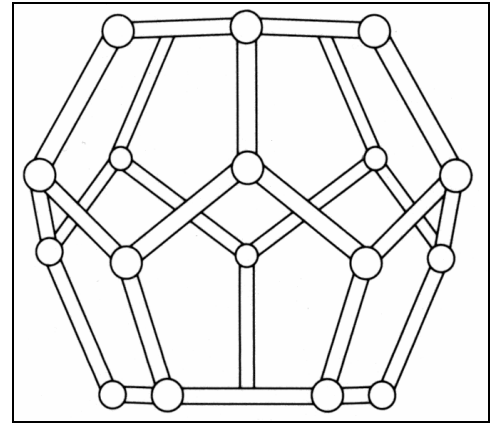

Property	Test Procedure	Units	MP15 FR
<b>Nominal Density - Skin/Skin</b>	BS ISO 7214 1998	kg/m <sup>3</sup>	15
<b>Cell Size – Typical Diameter</b>	Internal	mm	0.90
<b>Compression Stress-Strain</b>	BS ISO 7214 1998		
10% compression		kPa	18
25% compression		kPa	35
40% compression		kPa	62
50% compression		kPa	89
<b>Compression Set</b>	BS ISO 7214 1998		
25% comp., 22hr, 23°C	25 mm cell-cell		
½ hr recovery		% set	18
24hr recovery		% set	5
50% comp., 22hr, 23°C			
½ hr recovery		% set	38
24hr recovery		% set	26.5
<b>Tensile Strength</b>	ISO 7214 1998	kPa	353
<b>Tensile Elongation</b>		%	146
<b>Tear Strength</b>	BS EN ISO 8067 1995	N/m	545
<b>Shore Hardness OO Scale</b>	ISO 868 1985		
10mm cell/cell thickness		OO	26
<b>Recommended operating temperature range*</b>	Internal	°C	+95 max -70 min
<b>Thermal Conductivity</b>	ISO 8302 1991	W /m.K	0.0390
mean temp of 10°C			
<b>Flammability</b>			
<b>Automotive</b>	FMVSS.302 – Burn rate	<100mm/min.	Pass > 3 mm thick
<b>Aerospace</b>	CAA 8 Section 2.2(b) Airbus ABD0031 CS 25.853(b) Appendix F		Complies Complies Complies
<b>Construction</b>	DIN 4102 : B1		Pass @ 6mm & 20mm
<b>Horizontal Burn Rate</b>	ISO 7214 1998		
5mm thick		mm/sec	4.0
13mm thick		mm/sec	2.6



#### **\* RECOMMENDED OPERATING TEMPERATURE RANGE**

The maximum operating temperature shown is defined as the temperature which will typically cause a linear shrinkage of 5% after a 24hr exposure period, using sample dimensions of 100mm x 100mm x 25mm. This figure is provided for general guidance only. The actual level of shrinkage the foam will undergo at any particular temperature is dependant on a number of system variables such as, sample dimensions, cell size, loading conditions and exposure period. Please refer to Technical Bulletin T2 for more detailed information.

#### **HEALTH & SAFETY**

A separate data sheet (T5) entitled "Health and Safety Information" should be consulted.

#### **PRODUCT SPECIFICATION**

This Property Data Sheet provides typical properties on representative samples of material. For a product specification please refer to data sheet T7.

#### **EXCLUSION OF LIABILITY**

Any information contained in this document is, to the best of the knowledge and belief of Zotefoams plc and of Zotefoams Inc. (together herein referred to as **ZOTEFOAMS**), accurate. Any liability on the part of **ZOTEFOAMS** or any subsidiary or holding company of **ZOTEFOAMS** for any loss, damage, costs or expenses directly or indirectly arising out of the use of such information or the use, application, adaptation or processing of any goods, materials or products described herein is, save as provided in **ZOTEFOAMS'** conditions of sale ("Conditions of Sale"), hereby excluded to the fullest extent permitted by law.

Where **ZOTEFOAMS'** goods or materials are to be used in conjunction with other goods or materials, it is the responsibility of the user to obtain from the manufacturers or suppliers of the other goods or materials all technical data and other properties relating to those other goods or materials. Save as provided in the Conditions of Sale no liability can be accepted in respect of the use of **ZOTEFOAMS'** goods or materials in conjunction with any other goods or materials.

Where **ZOTEFOAMS'** goods or materials are likely to come into contact with foodstuffs or pharmaceuticals, whether directly or indirectly, or are likely to be used in the manufacture of toys, prior written confirmation of compliance with relevant legislative or regulatory standards for those applications may be requested from **ZOTEFOAMS**, if appropriate. Save as provided in the Conditions of Sale no liability can be accepted for any damage, loss or injury directly or indirectly arising out of any failure by the user to obtain such confirmation or to observe any recommendations given by or on behalf of **ZOTEFOAMS**.

**ZOTEFOAMS MAKES NO WARRANTIES EXPRESS OR IMPLIED, EXCEPT TO THE EXTENT SET OUT IN THE CONDITIONS OF SALE, AND HEREBY SPECIFICALLY EXCLUDES ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO ANY GOODS, MATERIALS OR PRODUCTS DESCRIBED HEREIN.**

Zotefoams plc  
675 Mitcham Road  
Croydon  
CR9 3AL  
United Kingdom  
Telefon: +44 (0) 20 8664 1600  
Telefax: +44 (0) 20 8664 1616